



Level Set II | LVT Stones & Woodgrains

Interface®

Hard meets soft, creating a perfect match

Hard and soft comes together in perfect unity to create a whole new world of inspired floor designs. Our foundational LVT Collection, Level Set™, inspired by earthy elements like wood and stone, has been thoughtfully designed – perfectly integrating and complimenting the same natural inspirations seen in our extensive carpet tiles range. No matter how you arrange them, these are designed to mix and flow seamlessly together. In fact, they fit like a glove without the need for transition strips, just beautiful, easy-care flooring from edge to edge, with no worry about doubling up on flooring materials.

Interface LVT is constructed from a combination of highly durable, recyclable layers. Scuffs and scratches from everyday wear are minimized by Ceramor™, a ceramic bead coating that protects the surface layer of the tile. A high performance backing layer, Sound Choice™ acts in the same way as our carpet tiles, reducing noise impact levels and delivering outstanding acoustic properties. And all these are backed by the same 15-year product warranty.

Now with an extended set of new Level Set™ styles to pick from, get the best of both worlds by pairing LVT with modular carpet tiles, and say hello to harmonious, gorgeous style.







LVT Textured Woodgrains **Colour** Antique Light Oak
Carpet Tile World Woven™ WW895 **Colour** Moorland Weave **Installed** Ashlar



LVT Natural Woodgrains **Colour** Storm **Installed** Ashlar
Carpet Tile World Woven™ Collins Cottage **Colour** Hound Linen **Installed** Quarter Turn



LVT Textured Woodgrains Colour Ash Walnut
Carpet Tile World Woven WW890 Colour Charcoal Dobby Installed Ashlar







LVT Textured Stones Colour Chestnut Horsehair
Carpet Tile World Woven™ WW860 Colour Brown Tweed **Installed** Ashlar



LVT Textured Stones Colour Cool Polished Cement
Carpet Tile World Woven™ Scottish Sett Colour Plaid Natural **Installed** Non-directional



Level Set™ II Collection | Woodgrains Colourline



A004-07
Textured Woodgrains - White Wash



A004-06
Textured Woodgrains - Antique Light Oak



A002-11
Natural Woodgrains - Washed Maple



A002-04
Natural Woodgrains - Beech



A004-14 **NEW**
Textured Woodgrains - Antique Maple



A004-01
Textured Woodgrains - Distressed Walnut



A002-01 **NEW**
Natural Woodgrains - Black Walnut



A002-08
Natural Woodgrains - Sand Dune



A004-03 **NEW**
Textured Woodgrains - Distressed Hickory



A002-12 **NEW**
Natural Woodgrains - Cedar



A002-03 **NEW**
Natural Woodgrains - Chestnut



A004-09
Textured Woodgrains - Ash Walnut



A002-02
Natural Woodgrains - Madagascar




A004-11
Textured Woodgrains - Dark Walnut

Level Set™ II Collection | Woodgrains Colourline



A004-05
Textured Woodgrains - Grey Dune

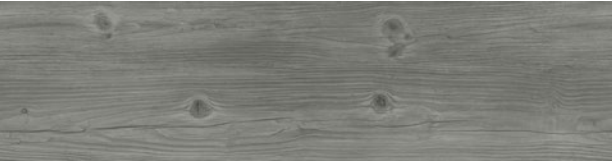

A002-06
Natural Woodgrains - Winter Grey



A002-05
Natural Woodgrains - Storm

Level Set™ II Collection | Stones Colourline



A003-01
Textured Stones - Polished Cement



A001-02
Natural Stones - Marone Dark Marble



A003-07
Textured Stones - Chestnut Horsehair



A003-02
Textured Stones - Cool Polished Cement



A003-03
Textured Stones - Warm Polished Cement



A001-03
Natural Stones - Cool Impala Marble



A001-01 **NEW**
Natural Stones - Jet Mist

Specifications

Level Set II Collection | Stones

Style Name / Number	Natural Stones - A001 Textured Stones - A003
Product Construction	High Performance Luxury Vinyl Tile
Wear Layer Thickness	0.55 mm
Total Thickness	4.5 mm
Classification	EN 651 Class 33 (heavy contract) Class 42 (light industrial general)
Acoustic Layer	SOUND CHOICE™ Acoustic Backing
Finish	CERAMOR™ UV Stabilized Ceramic Bead Coating
Nominal Dimensions	50cm x 50cm

Performance


Critical Heat Flux	AS ISO 9239-1	>7kW/m ²
Smoke Rate	AS ISO 9239-1	<750%min
Size, Tolerance	ISO 24342	<400 mm < 0.25 mm >400 mm < 0.35 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor Chair	ISO 4918	Pass (25,000 cycles)
Abrasion Resistance	EN 660-2	<2 mm ³ /100 cycles volume loss (T)
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV
Acoustic Impact Noise Reduction	ISO 140.8	ΔL _w = 16dB

Environmental

Ingredients & Life Cycle Impacts	Environmental Product Declaration
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: <i>Low Emitting Materials</i> ; M&R: <i>EPD and EPR</i>
End of Life	Fully Recyclable LVT to Carpet Tile Backing Recycling

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry®
Warranty	15 Year Limited Commercial Warranty
Installation Methods	Non Directional, Ashlar, Brick, Monolithic, Quarter-Turn



Specifications

Level Set II Collection | Woodgrains

Style Name / Number	Textured Woodgrains - A004 Natural Woodgrains - A002
Product Construction	High Performance Luxury Vinyl Plank
Wear Layer Thickness	0.55 mm
Total Thickness	4.5 mm
Classification	EN 651 Class 33 (heavy contract) Class 42 (light industrial general)
Acoustic Layer	SOUND CHOICE™ Acoustic Backing
Finish	CERAMOR™ UV Stabilized Ceramic Bead Coating
Nominal Dimensions	25cm x 100cm

Performance

Critical Heat Flux	AS ISO 9239-1	>7kW/m ²
Smoke Rate	AS ISO 9239-1	<750%min
Size, Tolerance	ISO 24342	<400 mm < 0.25 mm >400 mm < 0.35 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor Chair	ISO 4918	Pass (25,000 cycles)
Abrasion Resistance	EN 660-2	<2 mm ³ /100 cycles volume loss (T)
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV
Acoustic Impact Noise Reduction	ISO 140.8	ΔL _w = 16dB

Environmental

Ingredients & Life Cycle Impacts	Environmental Product Declaration
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: <i>Low Emitting Materials</i> ; M&R: <i>EPD and EPR</i>
End of Life	Fully Recyclable LVT to Carpet Tile Backing Recycling

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry®
Warranty	15 Year Limited Commercial Warranty
Installation Methods	Ashlar, Herringbone





TacTiles™
GlasBac®
GlasBac®RE

Interface
Recycle used carpet:
U.S. 888 733 6873
Canada 866 398 3191
Europe reentry.europe@
interface.com

TacTiles™
GlasBac®
GlasBac®RE

Interface
Recycle used carpet:
U.S. 888 733 6873
Canada 866 398 3191
Europe reentry.europe@
interface.com

LVT Natural Woodgrains **Colour Storm**
Carpet Tile World Woven™ WW895 **Colour Heather Weave**



LVT Textured Stones **Colour Chestnut Horsehair** **Installed Quarter Turn**
Carpet Tile World Woven™ WW880 **Colour Charcoal Loom** **Installed Ashlar**

As part of Interface's Mission Zero promise to eliminate any negative impact on the environment by 2020, we always consider the environment impact of every creative, manufacturing and building decision. This sample book is printed on recycled paper and with soy based ink. Twenty four virgin trees were saved from our use of 1725kg of recycled paper in the production of 5000 sample books. Energy intensity also decreased and greenhouse gases were reduced. The other reductions came from waste water and solid waste. Through our sample reclamation program, we help keep sample materials out of landfill by re-using them until it is time to recycle these sample materials.

www.interface.com

South East Asia

Interface Asia
tel: 65-6478 1510
www.interface.com

South Korea

tel. 82-2-555 1734
www.interface.com

Japan

Interface Japan
tel: 81-3-5733 5211
www.interface.com

India

Interface India
tel: 91 80 30589350
www.interface.com

Beijing Studio

Interface China
tel: 86-10-6590 7810
www.interface.com.cn

Hongkong Studio

Interface China
tel: 852-2802 0838
www.interface.com.cn

Shanghai Studio

Interface China
tel: 86-21-6340 3868
www.interface.com.cn

Australia

Interface Australia
local toll free: 1800 008 101
www.interface.com

03/2018
SF0105T0



Mission Zero:
our promise to eliminate any
negative impact our company
may have on the environment
by the year 2020.