




Design Vinyl Sheet

eternal[®] eternal[®] NEXT

wood | material | colour

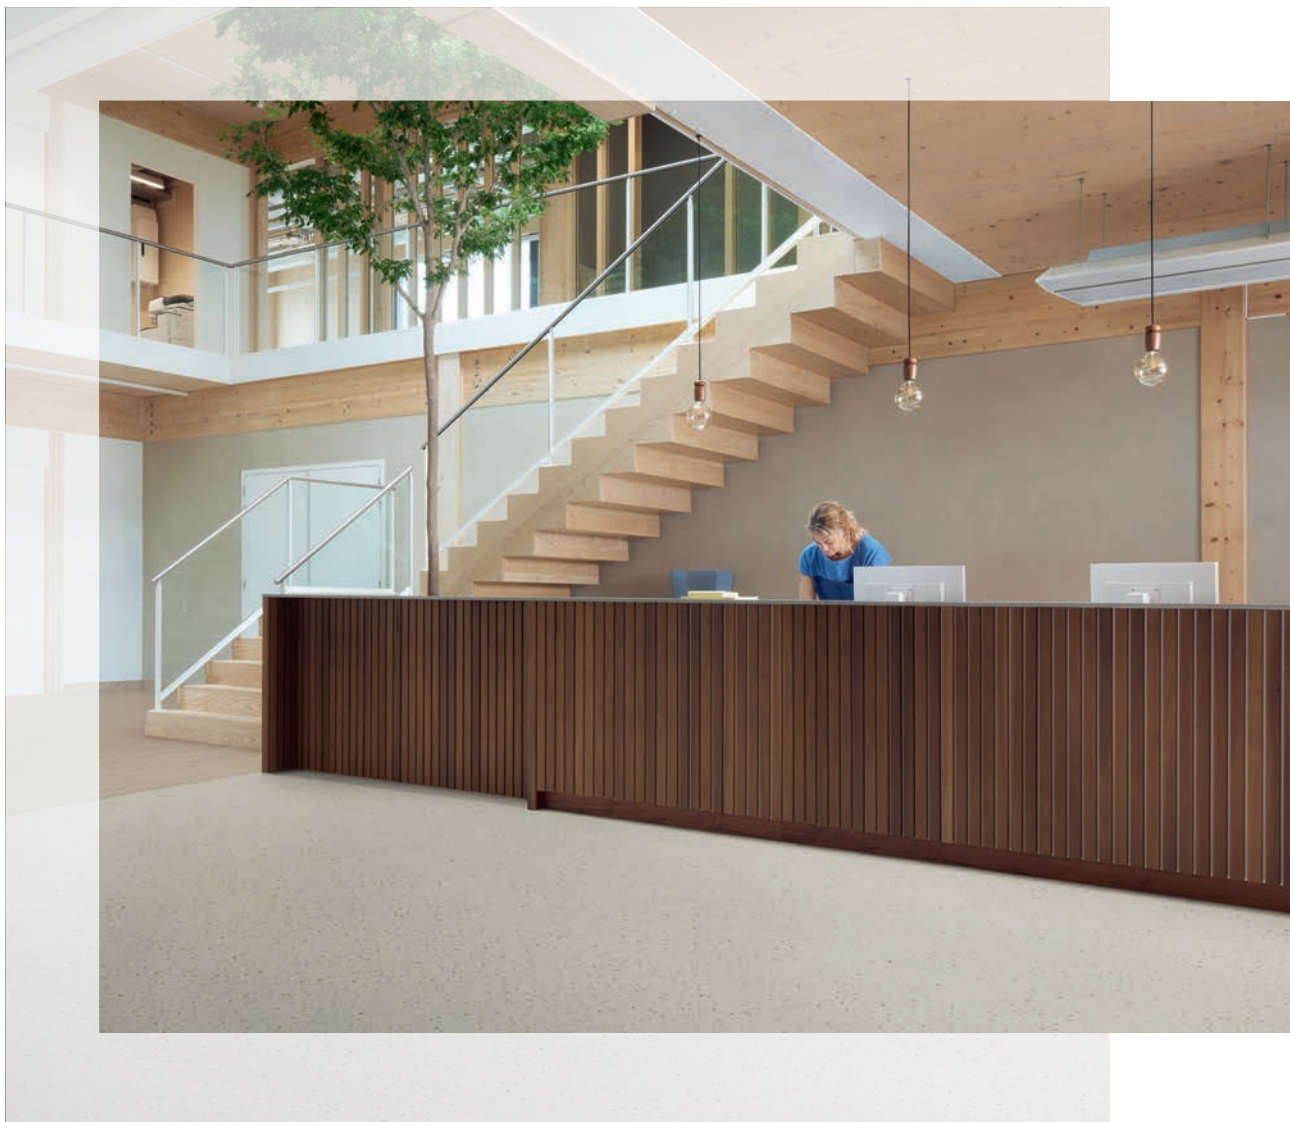

25 m x 2 m

creating better environments



FLOORING SYSTEMS



ETERNAL NEXT

ADHESIVE FREE SHEET SOLUTION

In this book a selection of items are also available in an adhesive free solution, identified by the Eternal Next icon beneath the sample.

The benefits of Eternal Next :

- Completely adhesive free
- Easy installation
- Minimum downtime of the location
- Easy to remove, replace, and recycle at end of life

An overview of the adhesive free items are displayed on the back of the sample pages.

For more details, please contact your local representative or visit our website: www.forbo-flooring.com.au/eternalnext





eternal®

Expertise and heritage in design vinyl sheet flooring

Experience the unmatched quality of our wood and material design flooring, with timeless designs that bring lasting elegance to any interior, ensuring your space stays stylish and contemporary for years to come. Choose Eternal design vinyl for its superior durability and sustainable craftsmanship, transforming your space with both beauty and long-lasting performance.

27862 | golden smooth oak



EXPERTISE IN DESIGN

- Created for lifelong stylish aesthetics in any project
- State of the art, in-house designs, with versatile combinations
- Various finishes for different effects, all offering superior performance: PUR Pearl: Natural look with easy cleaning
PUR Satin: The most matt finish
PUR Wood: Authentic wood design appearance
- Coordinated design with Modul'up loose lay, Step safety flooring and other Forbo Flooring ranges



EXPERTISE IN PERFORMANCE

- The ultimate worry-free floor, delivering high quality performance for decades
- Lowest possible residual indentation, thanks to the balanced construction
- Best protection against scuffs and scratching with Forbo's proven PUR Pearl lacquering and embossing techniques
- Trusted product construction shows superior durability from installation to end-of-life
- Quick adhesive free installation with Eternal Next, drawing from Forbo's adhesive free expertise, and easier recycling




EXPERTISE IN SUSTAINABILITY

- Contains at least 20% recycled content, with all production waste repurposed
- 100% phthalate free and lowest possible emission levels
- Manufactured using 100% green electricity from renewable sources, meeting all relevant quality and environmental standards
- Micro embossing technology reduces the need for chemical cleaning, extending the floor's lifespan
- Pair with our Coral entrance matting to increase product longevity
- Eternal has been certified by Global GreenTag GreenRate Level A, Best Environmental Practice (BEP) PVC and product-specific Environmental Product Declaration (EPD)




27852 | clear smooth oak

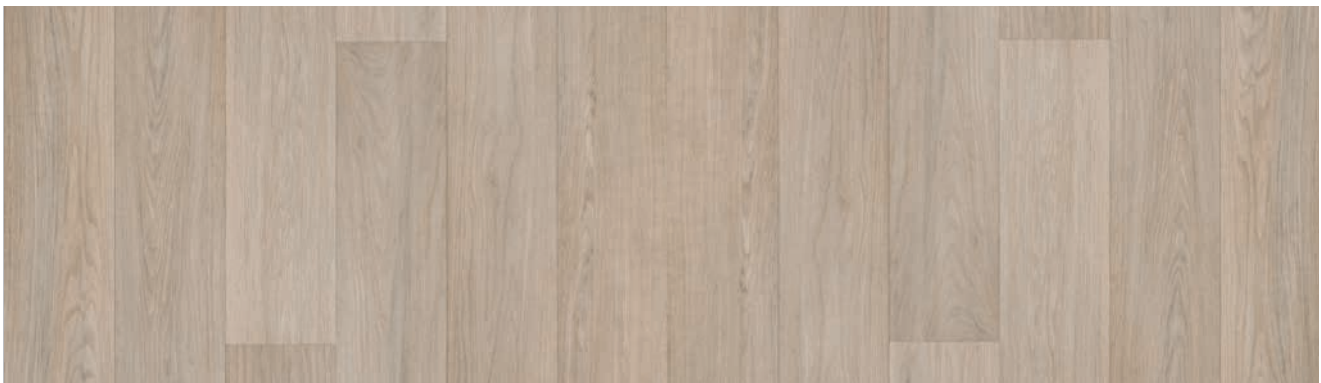

27852 | clear smooth oak

627852 | clear smooth oak **eternal®NEXT**


LRV 33%

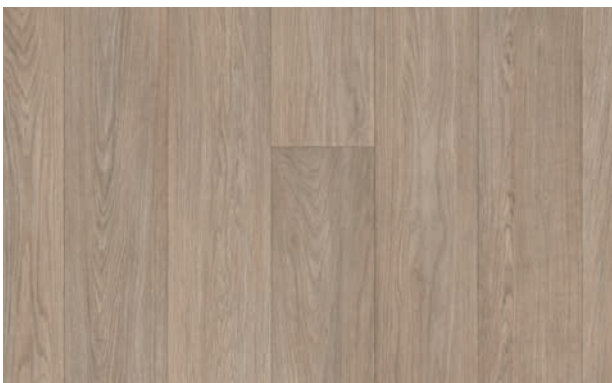

27862 | golden smooth oak

627862 | golden smooth oak **eternal®NEXT**

LRV 28%

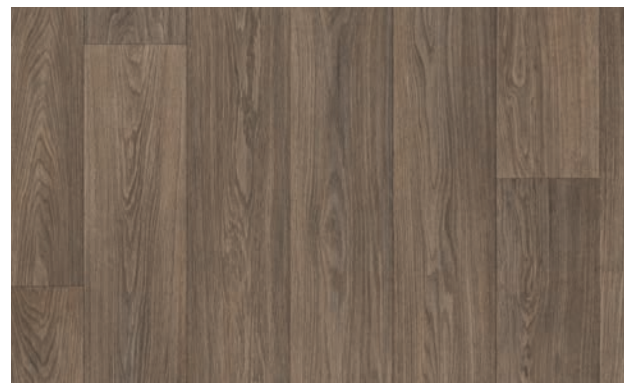

27872 | dark smooth oak

LRV 20%





13922 | bleached timber

LRV 36%



13802 | blond timber

LRV 26%



13942 | classic timber

LRV 22%




42562 | ochre **13942** | classic timber




12802 | elegant oak
612802 | elegant oak **eternal[®]NEXT**

LRV 32%

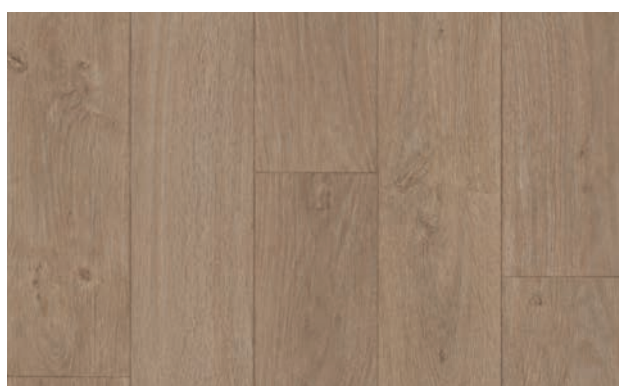

12832 | natural oak

LRV 27%

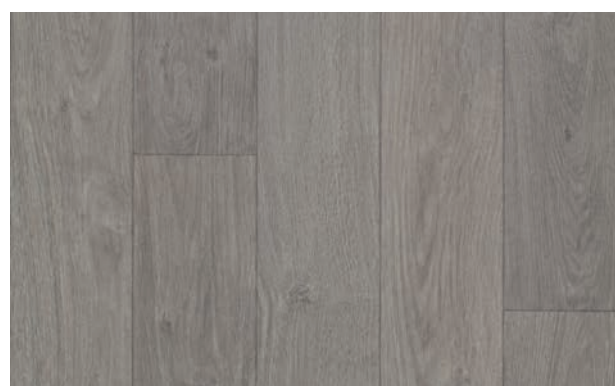

12862 | grey oak

LRV 25%



13412 | shadow oak
613412 | shadow oak **eternal[®]NEXT**

LRV 20%



10362 | warm chestnut
610362 | warm chestnut **eternal[®]NEXT**

LRV 17%











11572 | limed oak

LRV 32%



11582 | amber oak

LRV 17%




11542 | traditional oak

LRV 22%



10232 | dark walnut

LRV 18%

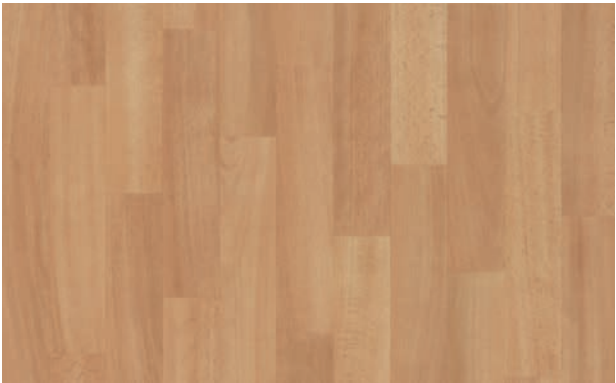

11442 | washed beech

LRV 28%



11162 | tropical beech

LRV 27%



10842 | cream oak

LRV 44%



10832 | hazelnut oak

LRV 21%



10852 | chocolate oak

LRV 17%



11652 | vintage oak



11652 | vintage oak

LRV 26%



11632 | light oak

LRV 31%



11952 | steamed oak **36932** | natural planks



11982 | blond oak


LRV 40%



11912 | whitewashed oak


LRV 30%

611912 | whitewashed oak **eternal[®]NEXT**

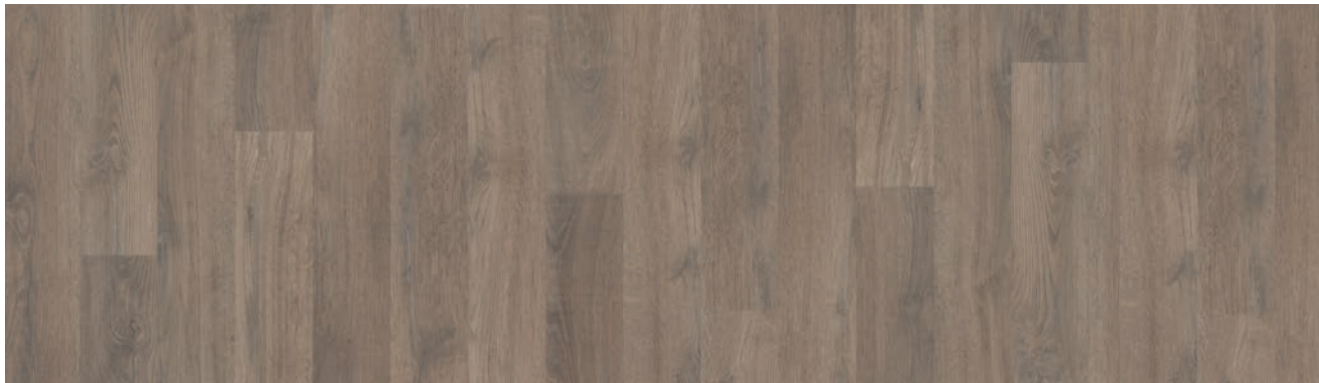

11952 | steamed oak


LRV 22%

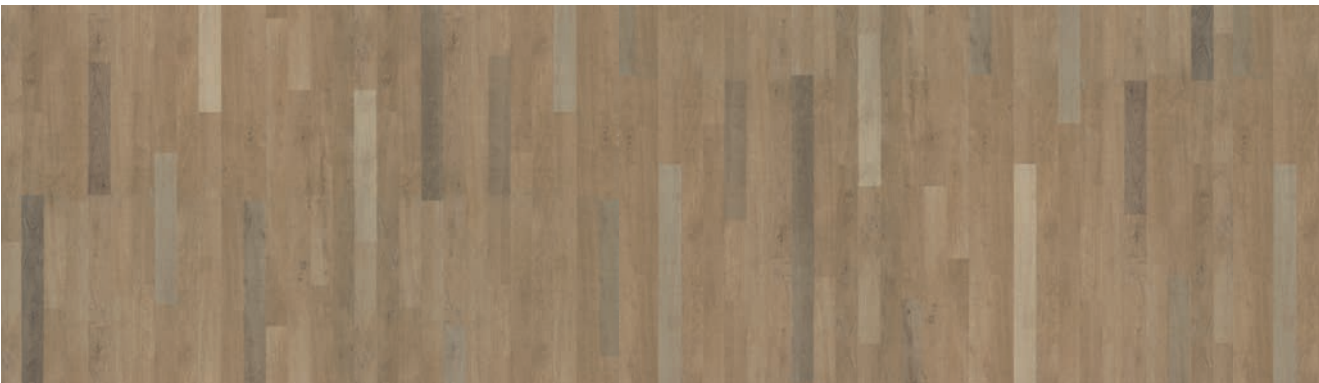

36932 | natural planks

LRV 30%



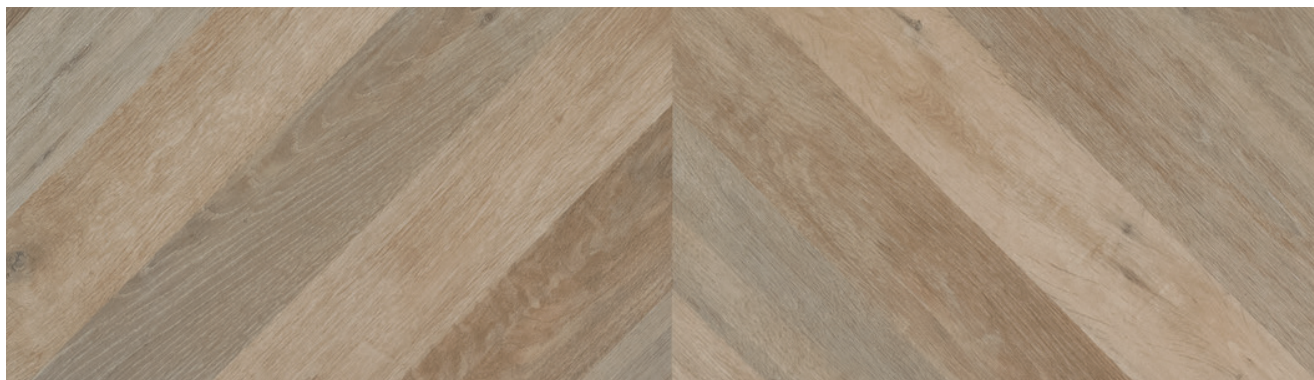

36202 | light herringbone

LRV 32%



36022 | classic herringbone


LRV 21%



36202 | light herringbone **42612** | elegance blush




27162 | brown infinite oak **27142** | pale infinite oak

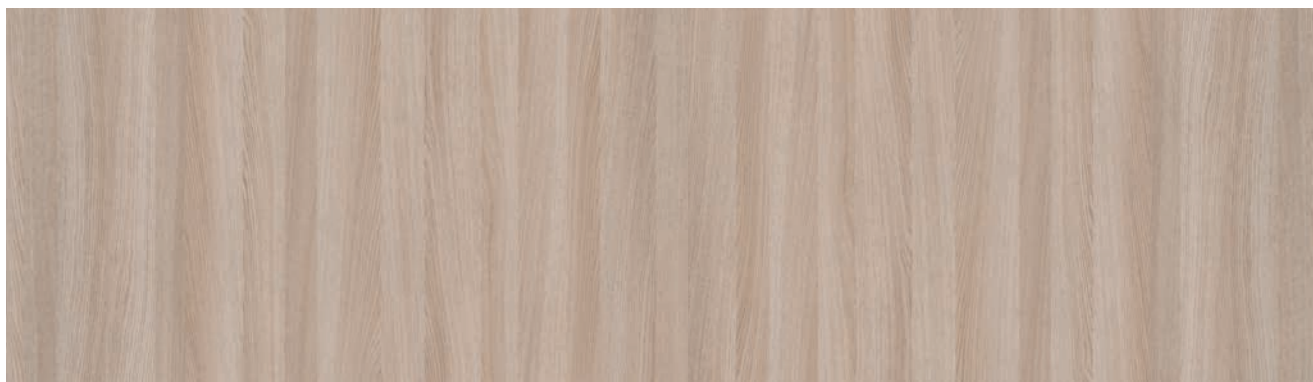


27142 | pale infinite oak

LRV 37%

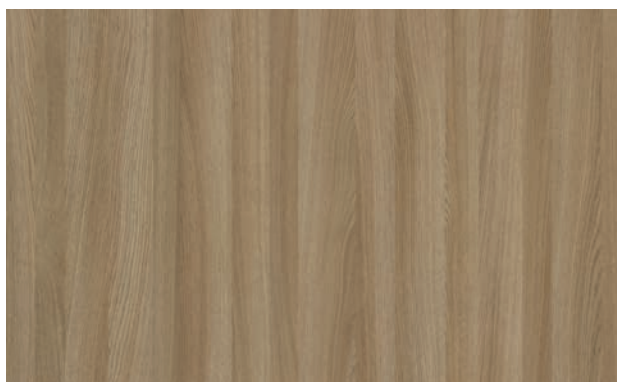

27152 | warm infinite oak

LRV 26%

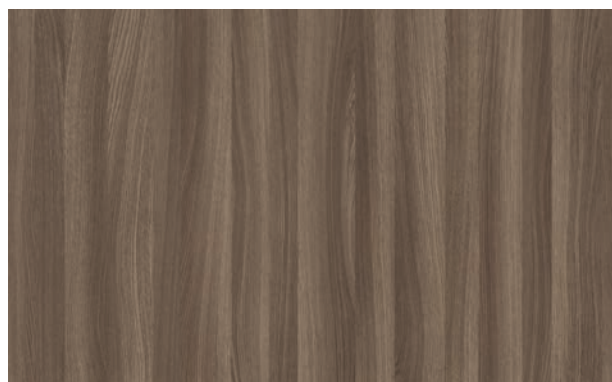

27162 | brown infinite oak

LRV 14%









36692 | travertin LRV 42%



10032 | fossil stucco LRV 34%
610032 | fossil stucco **eternal®NEXT**



10012 | pebble stucco LRV 18%



36702 | travertin prism LRV 38%



10042 | graphite stucco LRV 22%
610042 | graphite stucco **eternal®NEXT**




36692 | travertin **36702** | travertin prism



36962 | wooddark prism **36642** | oak wood mix



36642 | oak wood mix LRV 51%

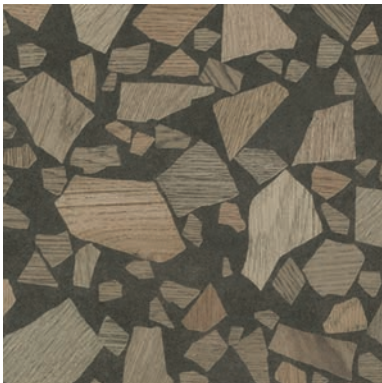


36322 | terra wood mix LRV 19%




36952 | woodlight prism LRV 34%



13202 | rust speckled ceramic LRV 15%

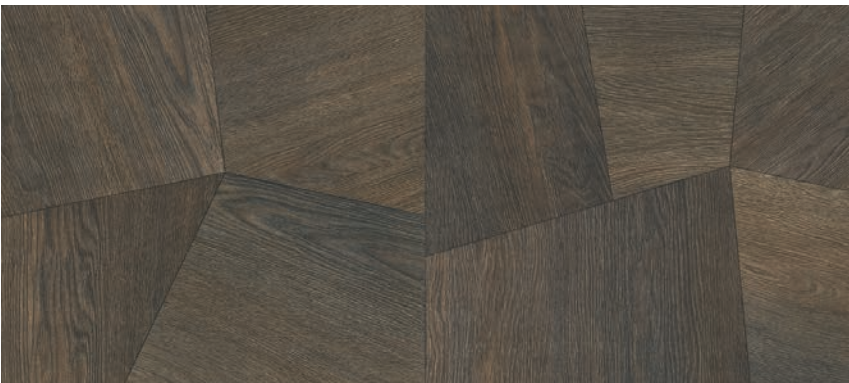

36962 | wooddark prism LRV 18%

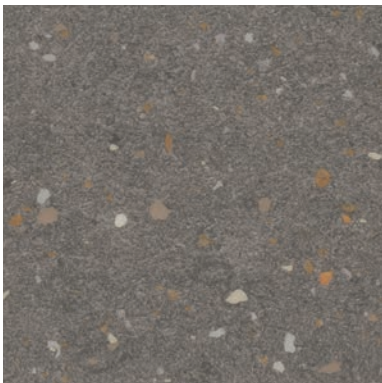

36672 | dusk pebble LRV 18%



42412 | elegance linen LRV 69%




42442 | limestone LRV 49%



42462 | elegance fossil LRV 30%



13212 | taupe speckled ceramic 13282 | taupe grid 4910 | bronze arc

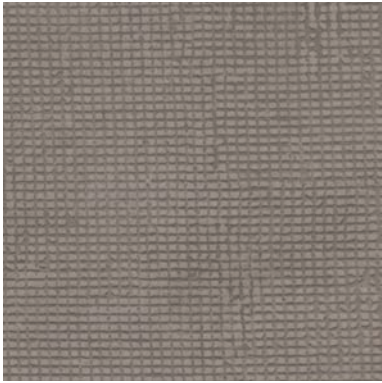

13282 | taupe grid LRV 22%



13212 | taupe speckled ceramic LRV 29%
613212 | taupe speckled ceramic eternal®NEXT



12472 | mortar textured concrete LRV 39%



13002 | silver concrete LRV 64%




13132 | warm concrete LRV 32%




13082 | gravel concrete **13022** | beton concrete



42482 | earth LRV 17%

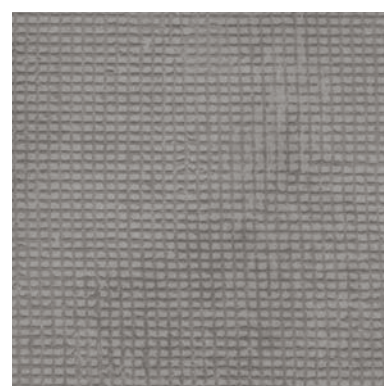

13262 | smoke grid LRV 25%

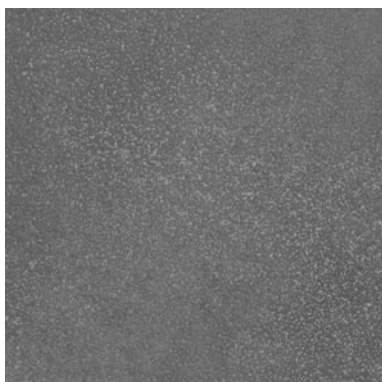

13192 | iron speckled ceramic LRV 15%
613192 | iron speckled ceramic **eternal®NEXT**



13032 | anthracite concrete LRV 11%



11872 | smoke cement LRV 23%



13022 | beton concrete LRV 28%
613022 | beton concrete **eternal®NEXT**



13082 | gravel concrete LRV 16%
613082 | gravel concrete **eternal®NEXT**



11842 | iron cement LRV 16%



42402 | elegance snow LRV 76%




42452 | greige LRV 38%



42472 | elephant LRV 19%



36682 | dawn pebble 13202 | rust speckled ceramic

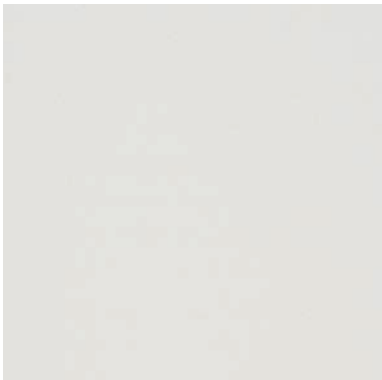


42432 | silt LRV 62%



11862 | grey cement LRV 28%



11832 | light cement LRV 37%

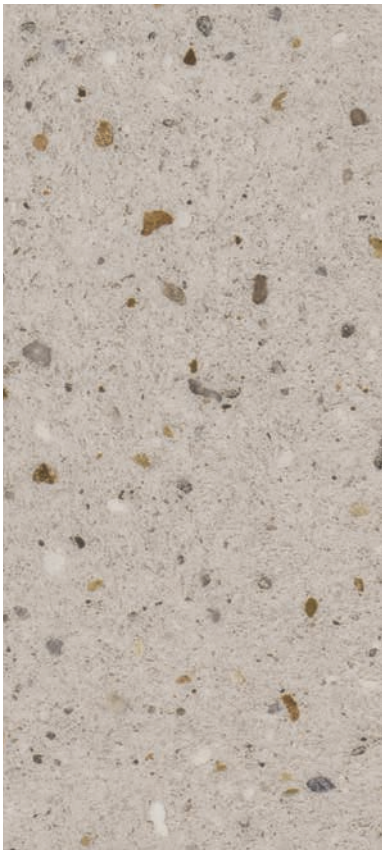

36682 | dawn pebble LRV 51%






36612 | denim wood mix **12232** | sapphire stone



42522 | elegance trout LRV 52%

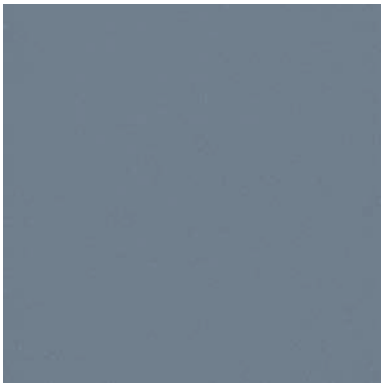


42542 | grey lavender LRV 21%




36612 | denim wood mix LRV 48%




42572 | steel LRV 10%

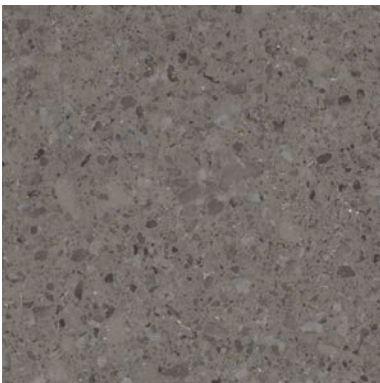

12012 | quartz stone LRV 20%

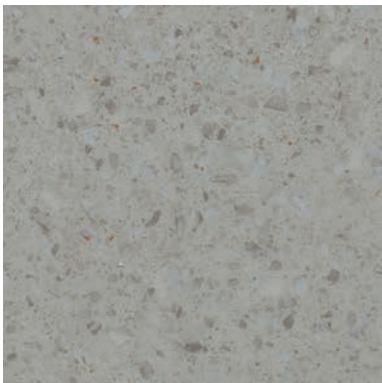

12092 | neutral stone LRV 35%

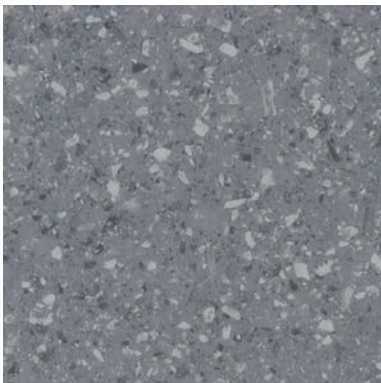

12232 | sapphire stone LRV 22%




42512 | elegance willow LRV 42%




42532 | elegance daffodil LRV 58%



42562 | ochre LRV 31%

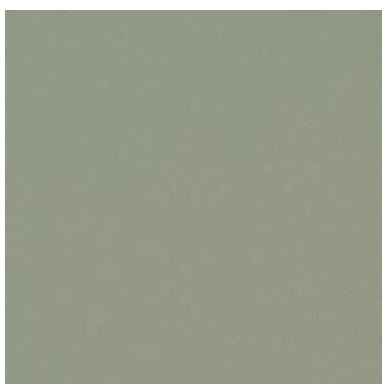


42492 | sage LRV 30%

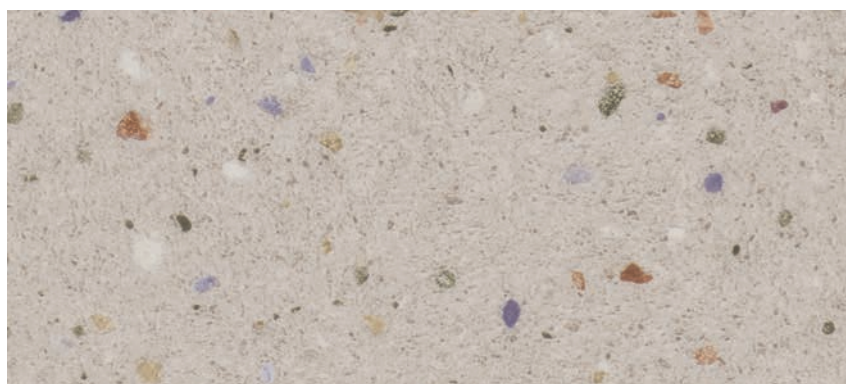

36652 | blossom pebble LRV 48%




42552 | bottle green LRV 15%

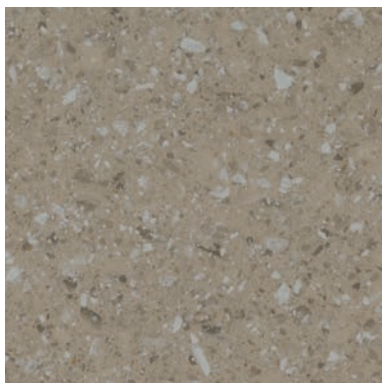

12242 | emerald stone LRV 28%



36652 | blossom pebble **42532** | elegance daffodil **42512** | elegance willow

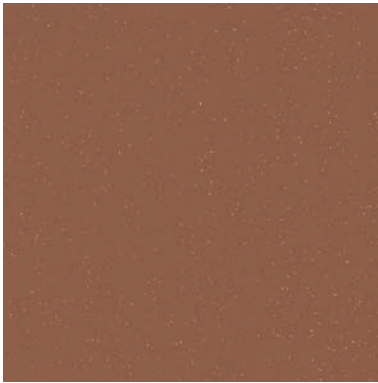

42592 | grey terra LRV 14%




42612 | elegance blush LRV 31%



42422 | salmon LRV 38%




42602 | elegance soft lilac LRV 38%

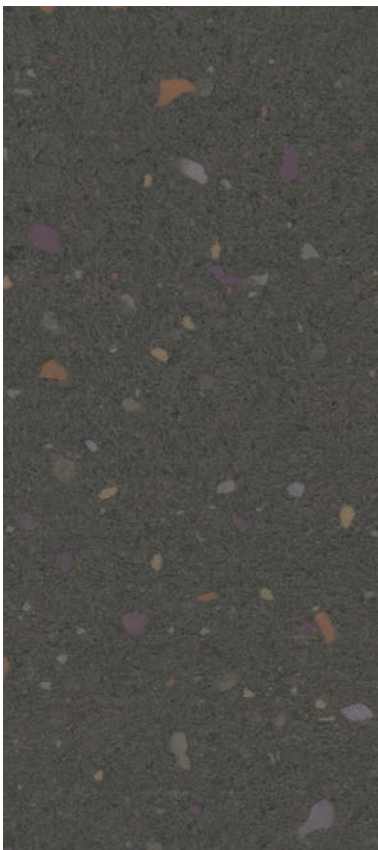

36662 | aurora pebble LRV 15%



42602 | elegance soft lilac **36942** | colourful planks

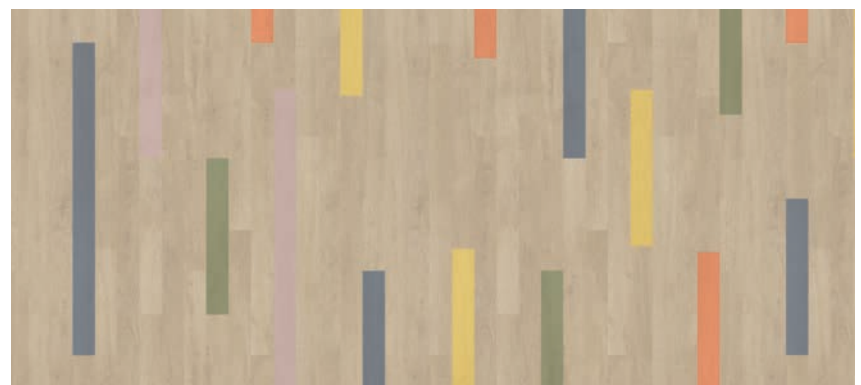

36942 | colourful planks

LRV 41%

Eternal adhesive free sheet solution


To further strengthen our Fast Flooring offer and contribute to a circular economy, we've developed an adhesive free solution for a selection of designs in our Eternal category.

This new option maintains Eternal's renowned quality while offering additional benefits.

Ready for a worry-free installation in commercial applications:


THE BENEFITS OF ETERNAL NEXT:

- True adhesive free solution
- Easy installation
- Stable with no movement during use or maintenance
- Low VOC emissions
- Ready for future recycling or reuse
- 24% recycled content (by mass)
- Easy to clean, scratch and chemical resistant
- 8 items with proven PUR Pearl for optimal durability
- 4 items with PUR Satin for an exceptionally matt finish

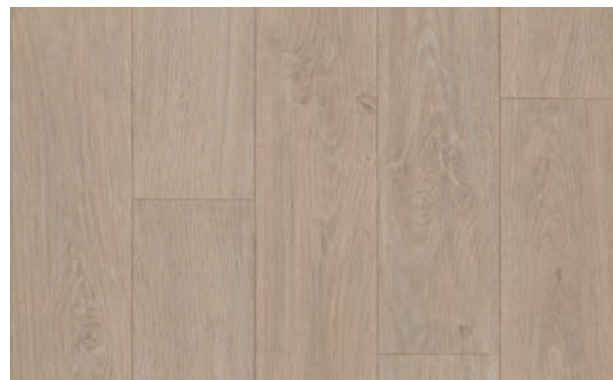


612802 | elegant oak

LRV 32%

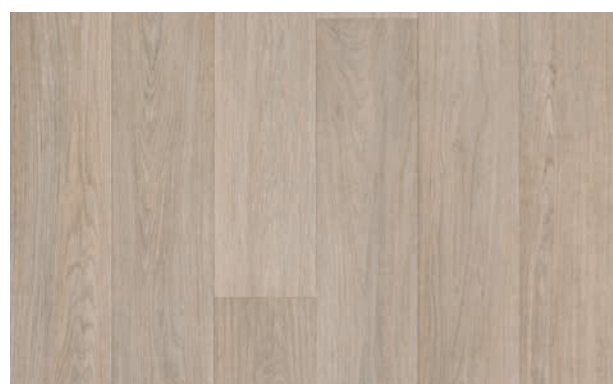


627852 | clear smooth oak*

LRV 33%

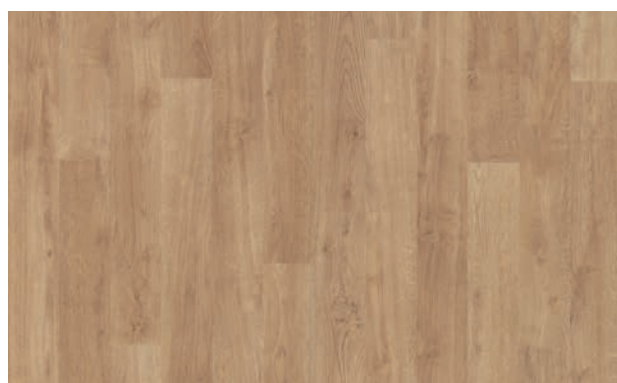

611912 | whitewashed oak

LRV 30%

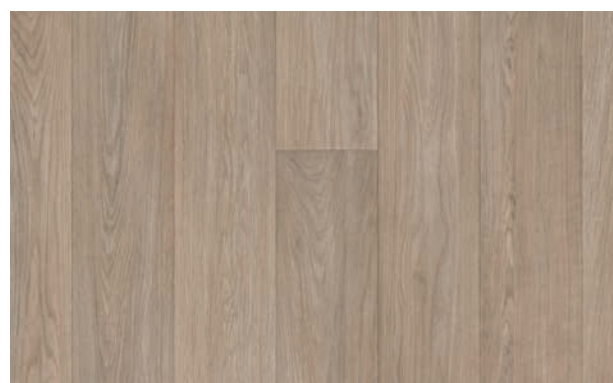


627862 | golden smooth oak*

LRV 28%



610362 | warm chestnut

LRV 17%

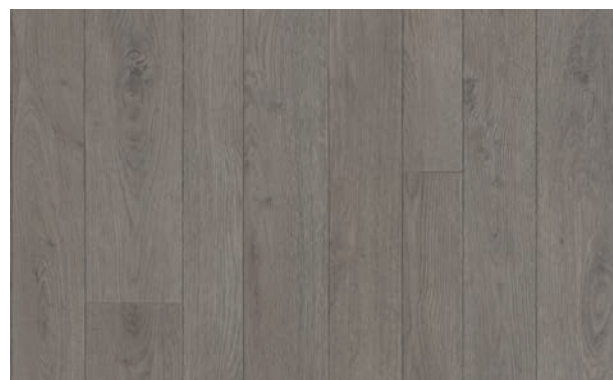

613412 | shadow oak

LRV 20%



610032 | fossil stucco



610032 | fossil stucco LRV 34%




613212 | taupe speckled ceramic* LRV 29%



613022 | beton concrete LRV 28%



610042 | graphite stucco LRV 22%

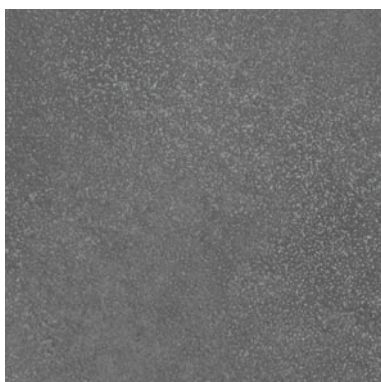

613192 | iron speckled ceramic* LRV 15%



613082 | gravel concrete LRV 16%







Technical specifications

Eternal meets the requirements of EN ISO 10582

		Eternal	Eternal Next	
	Total thickness	EN ISO 24346	2.0 mm	2.5 mm
	Surface finish		PUR Pearl / Satin / Wood	PUR Pearl / Satin
	Wear layer thickness	EN ISO 24340	0.70 mm	0.70 mm
	Wear layer binder content	EN ISO 10582	Type 1	Type 1
	Collection size		85	12
	Domestic use	EN ISO 10874	Class 23	Class 23
	Commercial use	EN ISO 10874	Class 34	Class 34
	Light industrial use	EN ISO 10874	Class 43	Class 43
	Roll width	EN ISO 24341	2.0 m	2.0 m
	Roll length	EN ISO 24341	≤ 25 m	≤ 25 m
	Total weight	EN ISO 23997	2800 g/m ²	3600 g/m ²
	Dimensional stability	EN ISO 23999	≤ 0.1 %	≤ 0.05 %
	Slip resistance	AS 4586:2013	R10 ¹	R10 ¹
	Castor chair continuous use	ISO 4918	Pass	Pass
	Residual indentation <i>Typical value</i>	EN ISO 24343-1	≤ 0.05 mm ~ 0.02 mm	≤ 0.10 mm ~ 0.04 mm
	Colour fastness to light	EN ISO 105-B02 method 3	≥ 6	≥ 6
	Indoor air emissions: TVOC after 28 days	ISO 16516	≤ 0.02 mg/m ³	≤ 0.01 mg/m ³
	Resistance to chemicals	EN ISO 26987	Very good	Very good
	Flexibility	EN ISO 24344	Ø 10 mm	Ø 10 mm
	Life Cycle Assessment		LCA is the foundation for securing the lowest environmental impact	
	Creating better environments			
	Renewable electricity		Eternal is manufactured using 100% electricity from renewable sources	
	Recycled content (mass)		30.5%	24%
Certifications			Eternal has been certified by Global GreenTag GreenRate - Level A, BEP PVC and Product Specific EPD	

Eternal meets the requirements of EN 14041

			EN 14041 CE 0200105-DoP-306	EN 14041 CE 0200106-DoP-410
	Reaction to fire	ISO 9239.1	CRF: 8.6kW/m ² , smoke development: 203%.min	CRF: 7.8kW/m ² , smoke development: 150%.min
	Slip resistance	EN 13893	μ ≥ 0.30	μ ≥ 0.30
	Thermal conductivity	EN 12524	0.25 W/mK	0.25 W/mK
	Body voltage	EN 1815	≤ 2.0 kV	≤ 2.0 kV

⁽¹⁾ Slip test result achieved in an independent laboratory on a new sample. On-site testing is variable and may not guarantee the same result. For sustainable slip resistance, use a particle-based floor such as the Step range.

All Forbo Flooring Systems' sales organisations worldwide have a certified Quality Management System in accordance with ISO 9001.

All Forbo Flooring Systems' manufacturing operations have a certified Environmental Management System in accordance with ISO 14001.

The Life Cycle Assessment (LCA) of Forbo Flooring Systems' products is documented in individual Environmental Product Declarations (EPD's) which can be found on all of our websites.



New Zealand
Inzide Commercial Ltd
Level 2, 34 Barrys Point Road
Takapuna Auckland 0622
Tel: +64 9 441 9850
Fax: +64 9 441 9851
www.inzide.co.nz
sales@inzide.co.nz

Australia
Forbo Flooring Systems Pty Ltd
23 Ormsby Place
Wetherill Park NSW 2164
Tel: +61 2 9828 0200
Fax: +61 2 9725 3456
E-mail: info.au@forbo.com
www.forbo-flooring.com.au

Find us on



creating better environments



FLOORING SYSTEMS