



Linoleum Sheet

marmoleum® marbled
real | fresco | vivace | splash | terra



≤ 33 x 2 m

creating better environments

forbo

FLOORING SYSTEMS



marmoleum® marbled

Magnificent by nature

Marmoleum Marbled is manufactured by nature. Plants are the source for this unique floor covering; as they grow they ultimately provide the natural ingredients for Marmoleum. When the flax plant flowers, linseed is produced from which the oil is extracted. Rosin, which is responsibly extracted from re-planted pine forests, is combined with the linseed oil to form the very essence of Marmoleum. Limestone and wood flour – residue from the recycled materials from the forestry industry – provide substance to the Marmoleum, while the fibres from the jute plant are used for the jute mesh carrier on which Marmoleum is calandered. Pigments colour the floor and give it its characteristic visual.

The weighted average of our Marmoleum range is CO2 neutral*. It is an all-time modern classic.

Defining Natural Spaces

*The natural beauty of a
CO₂ neutral* floor covering*

MADE BY NATURE

- Manufactured from 97% natural raw materials, 62% renewable, 43% reused and recycled material.
- Free from plasticisers and synthetic additives
- CO₂ neutral cradle-to-gate floor covering solution* (net-zero carbon)
- Low emissions and positively contributes to a healthy indoor environment

INSPIRED BY NATURE

- Largest sustainable floor covering colour bank
- The softer, natural feel of Marbled co-ordinates well with woods and stones
- Its blend of colours provides versatility when combining with other surfaces
- The different patterns can be effortlessly mixed or used alone
- Beautiful organic structures create interest and bring uniqueness

RELIABLE BY NATURE

- Proven durability and performance
- No need to weld in most applications
- Naturally bacteriostatic throughout the product's life
- Easy to clean



*The weighted average of our Marmoleum product range is CO₂ neutral (cradle to gate) without offsetting.





3257 | edelweiss | fresco
NCS S 2005-G80Y | LRV 58 2.5 mm



3136 | concrete | real A
NCS S 3005-G80Y | LRV 47 2.0 | 2.5 mm



3146 | serene grey | real 18 dB | 4 | A
NCS S 4502-Y | LRV 27 2.0 | 2.5 | 3.2 mm



3889 | cinder | fresco
NCS S 3502-Y | LRV 30 2.5 mm



2629 | eiger | real
NCS S 6005-G80Y | LRV 19 2.0 | 2.5 mm



5802 | alpine mist | terra
NCS S 3005-G50Y | LRV 31 2.5 mm



3405 | Granada | vivace
NCS S 5005-Y20R | LRV 28 2.5 mm



3048 | graphite | real 14 dB | 18 dB | 4 | A
NCS S 7502-Y | LRV 14 2.0 | 2.5 | 3.2 mm



3139 | lava | fresco 14 dB | A
NCS S 8000-N | LRV 9 2.0 | 2.5 | 3.2 mm



2939 | black | fresco 4 | A
NCS S 9000-N | LRV 5 2.0 | 2.5 mm

marmoleum®



3860 | silver shadow | fresco 18 dB | A
NCS S 2005-G70Y | LRV 48 2.0 | 2.5 mm



3883 | moonstone | fresco
NCS S 2502-G | LRV 45 2.5 mm



3032 | mist grey | real 14 dB | 4 | A
NCS S 3005-G80Y | LRV 42 2.0 | 2.5 | 3.2 mm



2621 | dove grey | real 18 dB
NCS S 3005-G50Y | LRV 36 2.5 mm



3428 | seashell | splash
NCS S 3005-G80Y | LRV 45 2.5 mm




3053 | dove blue | real 18 dB
NCS S 4005-B80G | LRV 27 2.0 | 2.5 mm



3420 | surprising storm | vivace
NCS S 4502-Y | LRV 31 2.5 mm



3866 | eternity | fresco A
NCS S 5502-G | LRV 21 2.0 | 2.5 mm



3137 | slate grey | real
NCS S 6502-Y | LRV 16 2.5 mm



3872 | volcanic ash | fresco 18 dB
NCS S 7500-N | LRV 10 2.5 mm



3421 | oyster mountain | vivace
NCS S 6502-Y | LRV 17 2.5 mm



3828 | blue heaven | fresco A
NCS S 3020-B10G | LRV 34 2.0 | 2.5 mm




3219 | spa | real
NCS S 3020-B30G | LRV 32 2.5 mm



3267 | aqua | fresco
NCS S 2030-B50G | LRV 39 2.5 mm



3266 | lilac | fresco
NCS S 3005-R20B | LRV 37 2.5 mm

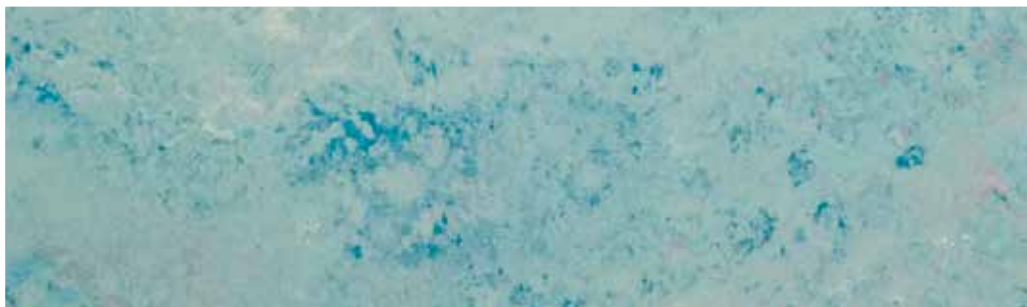

3429 | bluemoon | splash
NCS S 3010-G20Y | LRV 45 2.5 mm



3270 | violet | real
NCS S 5020-R70B | LRV 17 2.5 mm




3123 | arabesque | real
NCS S 5000-N | LRV 23 2.5 mm




3269 | turquoise | fresco
NCS S 3040-B50G | LRV 28 2.5 mm



3264 | Greek blue | fresco
NCS S 3050-B | LRV 17 2.5 mm



3055 | fresco blue | real 14 dB | 4 | A
NCS S 4020-B | LRV 23 2.0 | 2.5 | 3.2 mm



3030 | blue | real 18 dB | A
NCS S 5030-R90B | LRV 12 2.0 | 2.5 mm



3261 | marine | fresco
NCS S 6030-B | LRV 8 2.5 mm



3430 | salsa verde | splash
NCS S 3010-G50Y | LRV 47 2.5 mm



3881 | green wellness | real
NCS S 2020-G90Y | LRV 51 2.0 | 2.5 mm



3224 | chartreuse | real 18 dB | A
NCS S 2050-G60Y | LRV 38 2.0 | 2.5 mm



3885 | spring buds | fresco
NCS S 2040-G60Y | LRV 46 2.5 mm



3891 | sage | fresco
NCS S 4010-G30Y | LRV 31 2.5 mm



3413 | green melody | vivace
NCS S 3030-G60Y | LRV 34 2.5 mm



3259 | mustard | fresco
NCS S 3040-Y | LRV 38 2.5 mm



3260 | leaf | fresco
NCS S 3030-G40Y | LRV 27 2.5 mm



3271 | hunter green | fresco
NCS S 5030-B90G | LRV 13 2.5 mm



3265 | avocado | fresco
NCS S 3030-G60Y | LRV 31 2.5 mm



3247 | green | fresco
NCS S 4050-G50Y | LRV 23 2.5 mm



3431 | limoncello | splash
NCS S 2010-G60Y | LRV 48 2.5 mm



3846 | natural corn | fresco A
NCS S 1030-Y10R | LRV 56 2.0 | 2.5 mm



3251 | lemon zest | fresco
NCS S 1050-Y10R | LRV 52 2.0 | 2.5 mm



3411 | sunny day | vivace
NCS S 2030-Y20R | LRV 45 2.5 mm



3225 | dandelion | real 18 dB | A
NCS S 2050-Y10R | LRV 46 2.5 mm



3173 | Van Gogh | real A
NCS S 2030-Y20R | LRV 46 2.0 | 2.5 mm



3125 | golden sunset | fresco
NCS S 1070-Y20R | LRV 38 2.0 | 2.5 mm



3174 | Sahara | real
NCS S 3040-Y30R | LRV 29 2.0 | 2.5 mm



2767 | rust | real
NCS S 4040-Y50R | LRV 19 2.5 mm



3203 | henna | fresco A
NCS S 5040-Y80R | LRV 11 2.5 mm

marmoleum®



3432 | fruit punch | splash
NCS S 3010-G90Y | LRV 46 2.5 mm



3847 | golden saffron | real
NCS S 2040-Y30R | LRV 41 2.0 | 2.5 mm



3262 | marigold | fresco
NCS S 1070-Y40R | LRV 34 2.5 mm



3825 | African desert | fresco
NCS S 2050-Y50R | LRV 26 2.5 mm




3126 | Kyoto | fresco
NCS S 2570-Y60R | LRV 18 2.5 mm



3263 | rose | fresco
NCS S 2060-Y90R | LRV 17 2.5 mm



3268 | honey suckle | real
NCS S 2040-R | LRV 33 2.5 mm

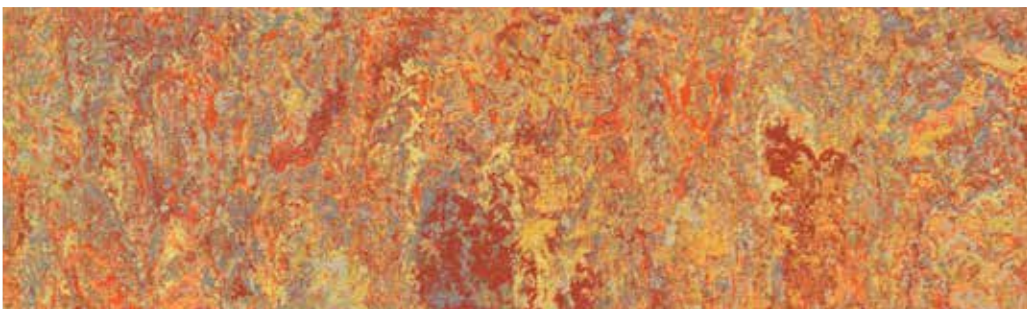

3403 | Asian tiger | vivace
NCS S 3040-Y30R | LRV 29 2.5 mm



3131 | scarlet | fresco
NCS S 1580-Y90R | LRV 13 2.5 mm



3127 | Bleekerstreet | real 18 dB | A
NCS S 2570-R | LRV 9 2.0 | 2.5 mm



3273 | ruby | fresco
NCS S 4050-R | LRV 10 2.5 mm



3272 | plum | real
NCS S 6020-R10B | LRV 13 2.5 mm

marmoleum®



2713 | calico | real
NCS S 2010-Y20R | LRV 53 2.5 mm



3120 | rosato | real 18 dB
NCS S 2010-Y20R | LRV 51 2.5 mm



3858 | Barbados | fresco A
NCS S 1510-Y10R | LRV 65 2.0 | 2.5 mm



2499 | sand | real
NCS S 1510-Y20R | LRV 56 2.0 | 2.5 mm



3861 | Arabian pearl | fresco
NCS S 2010-Y20R | LRV 50 2.0 | 2.5 mm



3141 | Himalaya | real A
NCS S 3020-Y10R | LRV 40 2.5 mm



5803 | weathered sand | terra
NCS S 4010-Y10R | LRV 31 2.5 mm



3232 | horse roan | real
NCS S 3010-Y20R | LRV 40 2.5 mm



3252 | sparrow | fresco 14 dB | 18 dB | A
NCS S 4010-Y10R | LRV 29 2.0 | 2.5 | 3.2 mm



5804 | pink granite | terra
NCS S 4010-Y30R | LRV 27 2.5 mm



3246 | shrike | fresco 18 dB
NCS S 6005-Y20R | LRV 21 2.5 mm



3254 | clay | fresco
NCS S 6010-Y30R | LRV 17 2.0 | 2.5 mm



3874 | walnut | fresco
NCS S 7010-Y50R | LRV 11 2.5 mm



3236 | dark bistre | real
NCS S 8502-Y | LRV 7 2.5 mm



3038 | Caribbean | real14 dB | 18 dB | 4 | A
NCS S 1515-Y20R | LRV 55 2.0 | 2.5 | 3.2 mm



3075 | shell | real A
NCS S 2020-Y20R | LRV 44 2.0 | 2.5 | 3.2 mm



3407 | donkey island | vivace
NCS S 3010-Y30R | LRV 36 2.5 mm



3433 | rockpool | splash
NCS S 3010-G80Y | LRV 46 2.5 mm



5801 | river bank | terra
NCS S 4010-G70Y | LRV 29 2.5 mm



3890 | oat | fresco
NCS S 3010-Y20R | LRV 31 2.5 mm



3234 | forest ground | real
NCS S 4010-Y10R | LRV 33 2.5 mm



3427 | agate | vivace
NCS S 3010-Y10R | LRV 39 2.5 mm



3426 | cork tree | vivace
NCS S 6010-Y10R | LRV 16 2.5 mm



3233 | shitake | real
NCS S 4020-Y30R | LRV 23 2.5 mm




Marmoleum Fresco – creating a fresh and delicate, balanced effect



*Marmoleum Splash,
the perfect floor to make
a subtle statement*

Marmoleum Splash is a new design in Forbo's Marmoleum portfolio. Splash is a lively, modern and playful design which makes a design statement when used on its own but at the same time serves as a connection between the more classic marbled and uni-patterned visuals in the collection.





*Marmoleum Terra,
an authentic mix
of earthy colours*

Marmoleum Terra provides a delicately marbled basis for contemporary spaces. The closed, tight and contrasting structure is inspired by igneous rock types. In a subtle way colours can be pulled from it to co-ordinate and complete an interior. Terra is a sophisticated design which is both elegant and soil hiding.



























Marmoleum Vivace – outspoken colour blend with excellent appearance retention




Technical specifications

Marmoleum meets the requirements of EN-ISO 24011

Marmoleum sheet Fresco, Real, Splash, Terra, Vivace

	Total thickness	EN-ISO 24346	2.5 mm
	Surface finish		Topshield pro
	Domestic use	EN-ISO 10874	Class 23
	Commercial use	EN-ISO 10874	Class 34
	Light Industrial use	EN-ISO 10874	Class 43
	Collection size		90
	Roll width	EN-ISO 24341	2.0 m
	Roll length	EN-ISO 24341	≤ 33 m
	Total weight <i>Typical value</i>	EN-ISO 23997	2900 g/m ²
	Residual indentation <i>Typical value</i>	EN-ISO 24343-1	≤ 0.15 mm ~0.08 mm
	Castor chair continuous use	ISO 4918	Pass
	Colour fastness to light	EN-ISO 105-B02 method 3	≥ 6
	Flexibility	EN-ISO 24344	ø 40 mm
	Resistance to chemicals	EN-ISO 26987	Resistant to diluted acids, oils, fats and to conventional solvents. Not resistant to prolonged exposure to alkalis.
	Bacteriostatic properties ⁽¹⁾		Marmoleum has natural bacteriostatic properties which are confirmed by independent laboratories, even against the bacteria MRSA.
	Cigarette resistance	EN 1399	There is no melting of the surface by cigarettes. Marks left on Marmoleum as a result of stubbed-out cigarettes can be removed.
	Indoor Air Emissions: TVOC at 28 days	EN 16516	≤ 0.01 mg/m ³
	Marmoleum Ohmex 2.5 mm is available in different colours:	EN 1081	Electrical resistance $1 \times 10^5 \Omega < R_1 < 1 \times 10^9 \Omega$ (static dissipative)
	Creating better environments		
	Life Cycle Assessment		LCA is the foundation for securing the lowest environmental impact.
	climate positive		Marmoleum 2.5 mm are produced climate positive (cradle to gate) ⁽²⁾ Every m ² of Marmoleum installed contributes to regenerating Australia's natural bushland and biodiversity through our partnership with Carbon Positive Australia (not as an offset program but rather as regeneration).
	renewable electricity		Marmoleum is manufactured using 100% electricity from renewable sources.
	natural materials (e.g. linseed oil, jute, tree resin, wood flour, limestone)		Marmoleum is made of natural raw materials. Marmoleum contains PEFC certified wood flour. Marmoleum is free of PVC, PET, synthetic rubber and plasticizers.
	GBCA Green Star rating system		GECA; LBC Red List Free.
	recycled content		Marmoleum contains recycled content.
	Social Accountability		Marmoleum is manufactured in a facility certified to SA8000.
	Application on underfloor heating		Yes
	Warranties		10 years or 15 on application with Coral entrance matting system.

Marmoleum meets the requirements of EN 14041:2004

	Product code	EN 14041	0100201-DoP-107
	Reaction to fire (floors)	AS ISO 9239.1	CRF: 6.6 kW/m ² , Smoke development: 112%.min
	Reaction to fire (walls)	AS/NZS 3837	Group 3 (172 m ² /kg)
	Slip resistance	AS 4586-2013	R10 ⁽³⁾
	Body voltage	EN 1815	≤ 2.0 kV
	Thermal resistance	EN 12524	0.17 W/mK

⁽¹⁾ Marmoleum sheet can be installed nett fit (without welding), or with a welding rod in the seam. Both are proven hygienic solutions.

⁽²⁾ For verification and details please consult our Marmoleum EPD.

⁽³⁾ Slip test result achieved in an independent laboratory on a new sample. On-site testing is variable and may not guarantee the same result. For sustainable slip resistance, a particle-based floor must be used.

For the latest installation instructions please visit www.forbo-flooring.com.au/installation.

All Forbo Flooring Systems' sales organisations worldwide have a certified Quality Management System in accordance with ISO 9001.

All Forbo Flooring Systems' manufacturing operations have a certified Environmental Management System in accordance with ISO 14001.

The Life Cycle Assessment (LCA) of Forbo Flooring Systems' products is documented in individual Environmental Product Declarations (EPD's) which can be found on all of our websites.



✉ info.au@forbo.com

📞 1800 224 471

🌐 forbo-flooring.com.au/marmoleum

📄 forbo-flooring.com.au/downloads



creating better environments

FLOORING SYSTEMS